

Everything for experienced and professional gardeners











INTRODUCTION

We have everything you need for a perfect garden – whether you are an everyday or expert home gardener or a groundcare and turf care professional

EXPERT RANGES:-

Lawnflite from petrol mowers to ride on tractors, from spreaders and trailers to scarifiers we have a wide range for the everyday and expert home gardener.

Agri-Fab® lawn products are designed for homeowners who want a beautiful lawn. The quality, time saving products including spreaders, dethatchers and trailers, will ensure you get the most out of your lawn tractor.

Mantis' range of tillers will help you grow great gardens and keep your lawns looking their best.

GTM's range of compact and powerful wood chippers are designed to offer a portable option for chipping branches and crops – perfect for tree care, landscaping, forestry and garden maintenance for expert gardeners and professionals.

PROFESSIONAL RANGES:-

Lawnflite PRO's range of lawnmowers and roller mowers are built to professional specifications with shaft driven gear boxes, heavy duty alloy decks and sealed roller bearings.

Little Wonder a range of landscaping debris management equipment including vacuums, blowers and brushcutters.

Classen professional turf care equipment includes aerators, overseeders, sod cutters and turf rakes all with productivity-enhancing features to help professionals complete more projects quickly and easily to increase profit.

CONTENTS

	LAWNMOWERS	
	OPTIMA PETROL MOWERS	4-5
	ROLLER MOWERS	6-7
	SCYTHE MOWER	8
PROFESSIONAL	LAWNFLITE PRO - PROFESSIONAL MOWERS	9-13
	LAWN TRACTORS	
	SMART MINI-RIDERS	14-15
	OPTIMA MINI-RIDERS	16-17
	SMART LAWN TRACTORS	18-21
	OPTIMA LAWN TRACTORS	22-23
	LAWN TRACTOR ACCESSORIES	
	LAWNFLITE AND TONDU	24-25
	AGRI-FAB	26-31
	LAWN AND GARDEN CARE PRODUCTS	
	SCARIFIERS	32-33
	MANTIS - TILLERS AND CULTIVATORS	34-41
	WHEELED TRIMMER	42
	SHREDDER	43
	GTM - WOOD CHIPPERS AND TREECARE	44-49
	LOG SPLITTERS	50-51
	CHAINSAW	51
	GROUNDCARE AND TURF CARE PRODUCTS	
PROFESSIONAL	CLASSEN	
	AERATORS, TURF OVERSEEDERS, SOD CUTTERS, TURF RAKES	52-61
PROFESSIONAL	LITTLE WONDER	
	VACS, BLOWERS, EDGER, BRUSHCUTTERS	62-71



OPTIMA PETROL MOWERS

The Optima range of lawnmowers are manufactured to suit expert gardeners who want quality, style and additional features at affordable prices.

With cutting widths ranging from 46cm / 18" to 53cm / 21" we can offer you the right mower to keep your lawn looking beautiful.

All models have easy to operate single lever height adjustment with settings from 28mm to a maximum of 92mm. The higher settings allow the machine to cope with longer grass on uneven ground.

Optima lawnmowers are powered by Honda and Briggs & Stratton engines. These engines offer high power with low fuel consumption, low emissions and low noise and are renowned for quality, easy starting and long life.

KEY BENEFITS

- Easy mowing on uneven lawns thanks to power drive and high rear wheels
- Choose between bagging or discharge of the clippings
- Mulch kit included as standard
- 4 Powerful engines









*2 years for domestic providing the machine is serviced by the supplying dealer.

MODELS AVAILABLE

















Model	OPTIMA 53SPBHW
Cutting width	53 cm / 21"
Engine	B&S 625 Series, 150 cc
Rated power (kW/min-1)	2.2 / 2,800
Drive	Self propelled, Hi/Wheel
Deck material	Steel
Start	Pull
Height adjustment	6 positions, central
Handle	Ergo 2 Handle fully foldable
Grass bag (approx.)	70 ltr, soft bag
Mulch kit	Standard
Wheels (f/r)	200 mm / 280 mm
Cutting height	28-92 mm
Weight (approx.)	36 kg
LpA/LwA/LwAg (dB)	86 / 96 / 98



Model	OPTIMA 53SPHHW
Cutting width	53 cm / 21"
Engine	Honda GCV160, 160 cc
Rated power (kW/min ⁻¹)	2.8 / 2,900
Drive	Self propelled, Hi/Wheel
Deck material	Steel
Start	Pull
Height adjustment	6 positions, central
Handle	Ergo 2 Handle fully foldable
Grass bag (approx.)	70 ltr, soft bag
Mulch kit	Standard
Wheels (f/r)	200 mm / 280 mm
Cutting height	28-92 mm
Weight (approx.)	36 kg
I pA/I wA/I wAg (dB)	86 / 96 / 98





Model	OPTIMA 53SPBHWIS
Cutting width	53 cm / 21"
Engine	B&S 675 EXi IS, 163 cc
Rated power (kW/min ⁻¹)	2.6 / 2,700
Drive	Self propelled, Hi/Wheel
Deck material	Steel
Start	Electric
Height adjustment	6 positions, central
Handle	Ergo 2 Handle fully foldable
Grass bag (approx.)	70 ltr, soft bag
Mulch kit	Standard
Wheels (f/r)	200 mm / 280 mm
Cutting height	28-92 mm
Weight (approx.)	38 kg
LpA/LwA/LwAg (dB)	86 / 96 / 98



ROLLER MOWERS

The NEW Lawnflite range of roller mowers enhance the mowing experience whilst delivering the perfect traditional striped finish.

The comfort handles and rear roller makes manoeuvring around the lawn a pleasure, whilst the self-propelled drive takes the effort out. The central height adjustment lever has 5 cutting height settings from 25mm up to 76mm and a large 60 litre grass bag with bag full indicator.

The range has been developed with cutting performance and comfort at the heart of the lawn mower.

All models in the roller range come complete with the reassurance of a two year domestic warranty.

KEY BENEFITS

- 1 Large 60 ltr grass bag
- 2 Comfort handle
- 3 Powerful Loncin engines
- Steel deck with washport and metal blade
- Split rear roller





WARRANTY*

*2 years for domestic providing the machine is serviced by the supplying dealer.

LRM21PDR

53 cm / 21" Loncin, 196 cc

Split rear roller

Steel

Recoil

60 ltr, soft bag

25-76 mm

MODELS AVAILABLE









Model	LRM21PDRES
Cutting width	53 cm / 21"
Engine	Loncin, 196 cc
Drive	Split rear roller
Deck material	Steel
Start	Electric
Speed	Self propelled / 4 speed propulsion
Grass bag (approx.)	60 ltr, soft bag
Cutting height	25-76 mm



SCYTHE MOWER

With a working width of 87cm / 34" and a powerful Briggs & Stratton engine, the scythe field mower is the ideal mower for long grass, meadows and paddocks. Optional dozer blade is available for snow clearing and moving soil, making the scythe field mower a valuable helper throughout the year.

KEY BENEFITS

- Non clogging universal knife bar with hardened knife blades
- Handle adjustable to suit height of operator
- 87cm / 34" cutting width with adjustable skid plates and side bumper
- Pneumatic wheels





Model	BM87-35
Cutting width	87 cm / 34"
Engine	B&S OHV 450 E Series, 125 cc
Rated power (kW/min ⁻¹)	1.7 / 3,100
Drive	Standard
Cutting system	Universal sickle bar with 4 bar guides
Start	Pull
Height adjustment	10 - 30 mm
Handle	Foldable
Fuel capacity	0.8 ltr
Chassis	Steel
Wheels	13" x 5" x 6", pneumatic
Weight (approx.)	53 kg
LpA/LwA/LwAg (dB)	86 / 98 / 99



S





KEY BENEFITS

- Heavy duty alloy decks built for professional use
- 2 Shaft driven gearbox offers extra durability
- Blade brake clutch stops the blade turning when emptying the grass bag
- Roller mower options provide the fine traditional striped finish
- Large heavy duty 70 or 75 litre fabric grass bag enables longer mowing time
- 6 Quiet operation with fan assisted collection
- Mulch kit and deflector available as accessories





MOWERS FOR PROFESSIONALS

Built to professional specifications, with shaft driven gear boxes, heavy duty alloy decks, sealed roller bearings and strong handles, the Lawnflite Pro range offers a machine to suit all applications.

For that fine lawn finish, the 448HR and 553HRS roller drive models are single speed with full width steel rollers producing a pronounced stripe on your lawn. They are quiet in operation, have fan assisted collection and a blade brake clutch which means you don't have to re-start the engine when emptying the grassbag. The 553HRS-PROHS sports a high speed gear to make short work of long lawns, 18% faster than the standard model 553HRS.

The top of the range 553HRSP-HST is a hydrostatic roller lawn mower which is 50% faster than the 553HRS-PROHS.

The four models in the wheeled range have all the features and benefits of the Lawnflite Pro roller mowers. The 448HW, 553HWS and 553HWS-PRO have 2 speed shaft drive gearboxes giving selectable speed to suit differing conditions.

The Pro models also offer additional features for the professional user including a front mounted bumper, strong handle tubes of 25mm plus an additional handle support bracket, a steel deck liner and on the wheeled models, 23cm / 9" alloy twin bearing wheels. The 553HWSP-HST has the additional benefit of Hydrostatic drive.



*12 months commercial warranty. 2 years for domestic use providing the machine is serviced by the supplying dealer. 90 days when sold and used for hire.





MODELS AVAILABLE



HONDA

ROLLER

Model	448HR
Cutting width	48 cm / 19"
Engine	Honda
Rated power (kW/ min ⁻¹)	3.7 / 3,600
Drive	Self propelled
Speed (km/h)	3.9
Deck material	Alloy
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Folding wing nut
Grass bag (approx.)	70 ltr
Mulch kit	N/A
Deflector	N/A
Wheels (f/r)	200 mm
Cutting height	15-77 mm
Weight (approx.)	50 kg
Vib. value body	2.2 m/s ²

PROFESSIONAL





Model	553HRS
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/ min ⁻¹)	3.4 / 3,600
Drive	Self propelled
Speed (km/h)	3.9
Deck material	Alloy
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear - 71901-924
Wheels (f/r)	200 mm
Cutting height	15-77 mm
Weight (approx.)	56 kg
Vib. value body	2.4 m/s ²



553HRS-PROHS
53 cm / 21"
Honda
3.4 / 3,600
Self propelled
4.6
Alloy with steel deck liner
Easy pull
Lever height adjustment
Strengthened, folding bolted
75 ltr
Optional - 71902-218
Optional rear - 71901-924
200 mm
15-77 mm
58 kg
2.4 m/s ²





553HRSP-HST
53 cm / 21"
Honda
3.4 / 3,600
Hydrostatic
0 - 6.5
Alloy with steel deck liner
Easy pull
Lever height adjustment
Strengthened, folding bolted
75 ltr
N/A
N/A
200 mm
15-77 mm
66 kg
2.4 m/s ²



HONDA.



448HW
48 cm / 19"
Honda
3.7 / 3,600
Self propelled, 2 speed
3.9
Alloy
Easy pull
Lever height adjustment
Folding wing nut
70 ltr
N/A
N/A
200 mm / 200 mm
15-77 mm
50 kg
2.2 m/s ²



Model	553HWS
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/ min-1)	3.4 / 3,600
Drive	Self propelled, 2 speed
Speed (km/h)	3.9
Deck material	Alloy
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear kit - 71901-924
Wheels (f/r)	200 mm / 200 mm
Cutting height	15-77 mm
Weight (approx.)	56 kg
Vib. value body	2.4 m/s ²

HONDA



Model	553HWS-PRO
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/ min ⁻¹)	3.4 / 3,600
Drive	Self propelled, 2 speed
Speed (km/h)	3.9
Deck material	Alloy with steel deck liner
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Strengthened, folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear - 71901-924
Wheels (f/r)	230 mm / 230 mm
Cutting height	22-82 mm
Weight (approx.)	62 kg
Vib. value body	2.4 m/s ²



Model	553HWSP-HST
Cutting width	53 cm / 21"
Engine	Honda
Rated power (kW/ min ⁻¹)	3.4 / 3,600
Drive	Hydrostatic
Speed (km/h)	0 - 6
Deck material	Alloy with steel deck liner
Start	Easy pull
Height adjustment	Lever height adjustment
Handle	Handle strengthened, folding bolted
Grass bag (approx.)	75 ltr
Mulch kit	Optional - 71902-218
Deflector	Optional rear - 71901-924
Wheels (f/r)	230 mm / 230 mm
Cutting height	22-84 mm
Weight (approx.)	68 kg
Vib. value body	2.4 m/s ²



SMART MINI-RIDERS

Our Smart mini-riders provide all the benefits of a lawn tractor in a more compact size. They are easy to operate, have an attractive design and are really versatile: they can bag, discharge or mulch grass clippings (optional kits may be required).

They are ideal for gardens where the use of a tractor is restricted by flowerbeds, bushes or corners.

The step through frame makes getting on and off easy and the choice of transmissions delivers a smooth and comfortable ride. After use they can be stored away easily.

KEY BENEFITS

- Laterally displaced deck allows mowing close to edges
- 2 Space saving storage thanks to small dimensions
- Large grass catcher (Standard on MINIRIDER60RDE)
- "Shift-on-the-go" transmatic transmission with 6 speeds
- Step through frame makes getting on and off easy



OPTIONAL ACCESSORIES

Optional mulch kit to fit model 60SDE.



Optional mulch kit and deflector to fit 60RDE.











Model	MINIRIDER60SDE
Cutting width	60 cm / 24"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 196 cc
Start	Electric
Rated power (kW/min ⁻¹)	3.3 / 3,000
uel capacity (approx.)	1.2 ltr
Fransmission	Transmatic
Grass catcher (approx.)	-
Mulch kit	Mulch plug only: available as accessory (Part no.: 19A30015000)
Deflector	Standard
Turning radius	46 cm / 18"
Vheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L158 / W 78 / H 110 cm
Weight (approx.)	111 kg
/ib. value body K Factor)	1 / 0.5 m/s²
pA/LwA/LwAg (dB)	86 / 96 / 98













OPTIMA MINI-RIDERS

If you need to cut around a third of an acre up to one acre and are looking for a machine that is well equipped, simple to use and easy to store with small dimensions, then the Optima mini-riders are for you.

These mini-riders combine all the advantages of a mini-rider with the performance of a lawn tractor. The level indicator conveniently allows you to monitor the large 4.9 litre fuel tank at any time. The step-through frame has no pedals or switches to get in the way, making getting on and off the machine safe and easy.

KEY BENEFITS

- Smooth and powerful MTD engine with convenient electric start
- Six speed transmatic transmission with continuous variable shifting or hydrostatic transmission
- Laterally displaced deck allows mowing close to lawn edges
- Compact design with a small turning radius of only 46cm / 18"
- Step through frame makes getting on and off safe and easy
- 200 ltre twin bag collector. NOTE:
 Will require additional high lift bagging blade 742-04058. (Optional on MINIRIDER76SDE)







*2 years for domestic providing the machine is serviced by the supplying dealer.









Model	MINIRIDER76SDE
Cutting width	76 cm / 30"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	6.0 / 3,000
Fuel capacity (approx.)	4.9 ltr
Transmission	Transmatic
Grass catcher (approx.)	Available as accessory (Part no.: 19A3001400EM)
Mulch kit	Standard
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L157 / W 85 / H 112 cm
Weight (approx.)	127 kg
Vib. value body (K Factor)	1 / 0.5 m/s²
LpA/LwA/LwAg (dB)	88 / 98 / 100









5

Model	MINIRIDER76RDE
Cutting width	76 cm / 30"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min-1)	7.6 / 2,800
Fuel capacity (approx.)	4.9 ltr
Transmission	Transmatic
Grass catcher (approx.)	150 ltr
Mulch kit	Available as accessory (Part no.: 196-334-600)
Deflector	Available as accessory (Part no.: 196-334-600)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L192 / W 83 / H 112 cm
Weight (approx.)	145 kg
Vib. value body (K Factor)	1 / 0.5 m/s²
LpA/LwA/LwAg (dB)	88 / 98 / 100









Model	MINIRIDER76RDHE
Cutting width	76 cm / 30"
Height adjustment	5 positions, 38-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	6.0 / 3,000
Fuel capacity (approx.)	4.9 ltr
Transmission	Hydrostatic
Grass catcher (approx.)	150 ltr
Mulch kit	Available as accessory (Part no.: 196-334-600)
Deflector	Available as accessory (Part no.: 196-334-600)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 16" x 6.5"
Measurements (approx.)	L192 / W 86 / H 112 cm
Weight (approx.)	145 kg
Vib. value body (K Factor)	1 / 0.5 m/s²
LpA/LwA/LwAg (dB)	88 / 98 / 100

2



SMART LAWN TRACTORS

If you have a large lawn to mow and want the job done as quickly as possible, a Smart lawn tractor is the perfect choice for you, whether you opt for a rear discharge or side discharge model.

Smart lawn tractors are practical, robust and reliable, and with a cutting width of 76cm / 30" to 105cm / 41", they are ideal for areas measuring 1000m² to 3000m².

Thanks to the small turning radius of 46cm / 18", mowing around bushes and flowerbeds is safe and simple. For your comfort a step through frame, makes it easy to get on and off, as well as an adjustable seat, headlights and ergonomically designed controls for deck engagement and transmission.

The cutting height can be easily adjusted to five positions between 30mm and 95mm.

KEY BENEFITS

- Step through frame makes getting on and off easy
- Large grass bag offers the ability to cover large areas in a short time
- 3 Small turning radius of only 46cm / 18"
- 4 Offset deck allows mowing close to the edge
- Floating deck and pivoting front axle enables smooth engagement
- "Direct Collect®"A large turbo fan assister on the RC125, coupled with the heavy duty cutter blade, physically throws and blows grass cuttings, leaves and other debris directly into the large capacity collector.
- Shift-on-the-go with continuous variable shifting.







*2 years for domestic providing the machine is serviced by the supplying dealer.





MODELS AVAILABLE











Model	RF125
Cutting width	96 cm / 38"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	7.6 / 2,800
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass bag (approx.)	Available as accessory (Part no.: OEM-190-180A)
Mulch kit	Available as accessory (Part no.: OEM-190A116
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L170 / W 107 / H 100 cm
Weight (approx.)	150 kg
Vib. value body (K Factor)	1 / 0.5 m/s²
LpA/LwA/LwAg (dB)	88 / 98 / 100











Model	RC125
Cutting width	76 cm / 30"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	6.5 / 2,400
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass catcher (approx.)	200 ltr, soft bag
Mulch kit	=
Deflector	Standard
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L224 / W 91 / H 103 cm
Weight (approx.)	185 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100













*2 years for domestic providing the machine is serviced by the supplying dealer.

Model	RE125
Cutting width	92 cm / 36"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	7.5 / 2,750
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass catcher (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L225 / W 99 / H 103 cm
Weight (approx.)	195 kg
Weight (approx.) Vib. value body (K Factor)	195 kg 1 / 0.5 m/s²
Vib. value body	3











	Model	RG145
T	Cutting width	92 cm / 36"
	Height adjustment	5 positions, 30-95 mm
	Engine	MTD, 1 cylinder, 382 cc
	Start	Electric
	Rated power (kW/min ⁻¹)	7.5 / 2,750
	Fuel capacity (approx.)	3.8 ltr
	Transmission	Hydrostatic
	Mulch kit	Available as accessory (Part no.: 196-749A678)
	Deflector	Available as accessory (Part no.: 196-750A678)
	Turning radius	46 cm / 18"
	Wheels (f/r)	13" x 5" / 18" x 6.5"
	Measurements (approx.)	L225 / W 99 / H 103 cm
	Weight (approx.)	195 kg
	Vib. value body (K Factor)	1 / 0.5 m/s²
	LpA/LwA/LwAg (dB)	88 / 98 / 100



Model	RE130H
Cutting width	92 cm / 36"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 1 cylinder, 382 cc
Start	Electric
Rated power (kW/min ⁻¹)	7.5 / 2,750
Fuel capacity (approx.)	3.8 ltr
Transmission	Hydrostatic
Grass catcher (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	13" x 5" / 18" x 6.5"
Measurements (approx.)	L225 / W 99 / H 103 cm
Weight (approx.)	195 kg
Vib. value body (K Factor)	1 / 0.5 m/s²
LpA/LwA/LwAg (dB)	88 / 98 / 100



Model	RN145
Cutting width	105 cm / 41"
Height adjustment	5 positions, 30-95 mm
Engine	MTD, 547 cc
Start	Electric
Rated power (kW/min ⁻¹)	8.9 / 2,600
Fuel capacity (approx.)	3.8 ltr
Transmission	Transmatic
Grass catcher (approx.)	240 ltr, soft bag with hard top
Mulch kit	Available as accessory (Part no.: 196-749A678)
Deflector	Available as accessory (Part no.: 196-750A678)
Turning radius	46 cm / 18"
Wheels (f/r)	15" x 6" / 18" x 9.5"
Measurements (approx.)	L225 / W 110 / H 103 cm
Weight (approx.)	198 kg
Vib. value body (K Factor)	1 / 0.5 m/s ²
LpA/LwA/LwAg (dB)	88 / 98 / 100



OPTIMA LAWN TRACTORS

Comfortable and versatile - you won't have to sacrifice a thing with Optima lawn tractors. With a cutting width of 105cm / 41" and 107cm / 42" they are ideal for mowing large areas. Optima lawn tractors are fitted with a high-performance engine, guaranteeing long service life, as well as a low-maintenance robust hydrostatic transmission as standard for a smooth and comfortable ride.

The forward-folding and removable hood gives easy access for maintenance work at any time. The floating deck adapts to uneven ground on rough terrains and can be cleaned with the utmost ease and convenience, thanks to the deck wash nozzle. Useful accessories such as a dozer blade, lawn sweeper and spreader attachments mean that a wide range of home and garden jobs can be completed more guickly and easily all year round.

KEY BENEFITS

- Powerful and quiet MTD engine
- Small turning radius of only 46cm / 18"
- Deck wash nozzle makes for easy deck cleaning
- Step through frame makes getting on and off easy
- Floating deck and pivoting front axle enables smooth engagement
- Large grass bag offers the ability to cover large areas in a short time
- Mowing deck with antiscalp wheels to prevent damage to the grass surface
- The LN200H with rear discharge has a grass catcher which is easy to empty from the driver's seat







*2 years for domestic providing the machine is serviced by the supplying dealer.

MODELS AVAILABLE











,	Model	LG200H	
	Cutting width	107 cm / 42"	
T	Height adjustment	5 positions, 30-95 mm	
	Engine	MTD, V Twin 679 cc	
	Start	Electric	
	Rated power (kW/min ⁻¹)	12.5 / 2,800	
	Fuel capacity (approx.)	3.8 ltr	
	Transmission	Hydrostatic	
	Grass catcher	Available as accessory (Part no.: 0EM-190-180A)	
	Mulch kit	Standard	
	Deflector	Standard	
	Turning radius	46 cm / 18"	
	Wheels (f/r)	15" x 6" / 20" x 8"	
	Measurements (approx.)	L170 / W 115 / H 100 cm	
	Weight (approx.)	175 kg	
	Vib. value body (K Factor)	1 / 0.5 m/s ²	
	LpA/LwA/LwAg (dB)	88 / 98 / 100	

OPTIONAL ACCESSORIES

Optional 210 litre capacity grass collector to fit model LG200H.





MTDI/	
HYDROSTA	








Model	LN200H	
Cutting width	105 cm / 41"	
Height adjustment	5 positions, 30-95 mm	
Engine	MTD, V Twin 679 cc	
Start	Electric	
Rated power (kW/min ⁻¹)	11.6 / 2,600	
Fuel capacity (approx.)	3.8 ltr	
Transmission	Hydrostatic	
Grass catcher (approx.)	240 ltr	
Mulch kit	Available as accessory (Part no.: 196-749A678)	
Deflector	Available as accessory (Part no.: 196-750A678)	
Turning radius	46 cm / 18"	
Wheels (f/r)	15" x 6" / 18" x 9.5"	
Measurements (approx.)	L225 / W 1109 / H 103 cm	
Weight (approx.)	198 kg	
Vib. value body (K Factor)	1 / 0.5 m/s ²	
LpA/LwA/LwAg (dB)	88 / 98 / 100	

OPTIONAL ACCESSORIES

Optional deflector to fit model LN200H.



Optional mulch kit to fit model LN200H.





TONDU AND LAWNFLITE LAWN TRACTOR PRODUCTS

Our Tondu and Lawnflite range of equipment includes trailers, de-thatchers, spreaders and rollers. To help you get the maximum out of your lawn tractor most products can be towed behind to help with your jobs around the garden.

TRAILERS are ideal for loading/unloading soil, gravel and sand A DETHATCHER will remove moss and thatch from your lawn **SPREADERS** are suitable for distributing fertiliser, grass seed and salt A STEEL ROLLER will help you achieve the traditional green stripes in your lawn

TRAILERS

UTILITY STEEL TRAILER LSC500

Ideal for unloading soil, gravel and sand as a well as carrying tools, animal feed, landscaping materials and firewood

Removable tailgate and foot pedal release help with loading and unloading and the trailer can easily convert into a flat-bed trailer without the need for tools

Suitable to use with all makes of lawn tractor, it has a capacity of 500lbs and a trailer bed that measure 97 cm x 71.5 cm x 30 cm





UTILITY STEEL TRAILER LSC1200

Ideal for unloading soil, gravel and sand as well as carrying tools, animal feed, landscaping materials and firewood

Foot pedal release mechanism for easy dumping and can be assembled in 25 minutes

A multi hitch makes it suitable to use with all makes of lawn tractor, it has a capacity of 1200 lbs and a large trailer bed that measure 150 cm x 77.5 cm x 51.6 cm



T-HANDLE PUSH/TOW POLY TRAILER LPC650

The versatile poly trailer can be used with your lawn tractor as a tow behind trailer or as a hand wheeled trailer with a comfortable T-handle

The one piece poly bed is quiet and resistant to rust with a slanted tail end and foot pedal release mechanism for easy tipping

With a 650 lbs capacity, it's a versatile choice for your garden



TONDU QUICK ASSEMBLY STEEL TRAILER TSC750

The steel trailer with a capacity of 750 lbs has folding sides and can be assembled in less than 15 minutes. It features a foot pedal release mechanism for easy dumping including a safety lock pin

The trailer bed measure 107 x 70 x 34 cm

A multi hitch makes it suitable to use with all makes of lawn tractor



TONDU UTILITY POLY TRAILER LPC1200

The poly dump trailer has a quick release tipper latch for its 1200 lbs capacity load

It features a rugged polyethylene bed and all steel durable tilt and pivot frame with a powder coat finish. Sealed ball bearings mean no greasing is required



40" TINE DETHATCHER LST40

The LST40 is a 40" /102 cm steel tine dethatcher that used regularly will remove moss and thatch from your lawn to keep it looking its best

It features 20 heat treated steel spring-loaded tines for long life.

The whole unit is constructed from steel and features a
heavy-duty tray to add weight for extra penetration.



125 LBS WALK BEHIND SPREADER TPS125A

The TPS125 is ideal for medium to large areas, which may be difficult to access. The poly hopper can hold up to 125 lbs / 60 ltr and the spreader plate is rust proof ensuring long life.

The pneumatic tyres enable this spreader to be easily pushed along the ground and its rain cover ensures materials are kept dry. A rate setting control on the handle helps with precise flow adjustments. As with all our spreaders, it is suitable for both fertiliser, seed and ice melt



100 LBS WALK BEHIND SALT SPREADER TPSS100

The TPSS100 is a 100 lbs walk behind salt spreader that can also be used for fertiliser and seed. It features a rate setting control, 12" pneumatic tyres, stainless steel parts and a spread width of 10' - 12'.



36" STEEL ROLLER LSR36

The LSR36 heavy duty puncture proof steel roller helps you achieve the traditional green stripe lawn effect as well as packing down new sod, seed and unlevel ground

The easy fill fitting means you can add water or sand easily to adjust the pressure placed on the ground - use less for soft ground and more for hard ground. It can be towed behind most lawn tractors or ride-on mowers.



70 LBS WALK BEHIND SPREADER TPS70

SPREADERS

The TPS70 is a 70 lbs walk behind spreader that features a rate setting control on the handle for precise adjustments. With a spread width of 10' – 12' it will help you distribute fertiliser and grass seed

The pneumatic tyres enable this spreader to be easily pushed along the ground and its rain cover ensures materials are kept dry



125 LBS TOW SPREADER LTS125

The LTS125 125lb is ideal for medium to large areas. The poly hopper can hold up to 125 lbs / 60 ltr, whilst the spreader plate is rust proof ensuring long life. The pneumatic tyres ensure this spreader can be easily towed behind most lawn tractors with a tow bar and its rain cover keeps everything dry

The flow lever can be easily operated from the driver's seat and can cover 25,000 sq. ft. suitable for use with both fertiliser, seed and ice melt



125 LBS WALK BEHIND SALT SPREADER TPSS125

The TPSS125 is a 125lb walk behind salt spreader for fertiliser and seed. With a rate setting control, 14" pneumatic tyres, stainless steel parts and solid linkage.





AGRI-FABIAWN TRACTOR PRODUCTS

Agri-Fab® is the largest supplier of tractor accessories in the world. Made in the US, they know what accessories lawn tractor users need.

Agri-Fab® lawn tractor products are designed for homeowners who want a beautiful lawn, yet want the job of lawn care to be guick and easy. Agri-Fab's quality and time-saving products will ensure you get the most out of your lawn tractor, making lawn care easy, year after year.

SMARTLINK™ SYSTEM

The Agri-Fab SmartLINK™ system is an incredibly innovative system, which allows different tools to be fitted to one main attachment, ideal for fitting on lawn and garden tractors and other ride-on mowers. All of the SmartLINK™ tools are fitted to the master-platform (45-0473 SmartLINK[™] Base) via a simple locking-mechanism - no tools required.

The 41" tractor-towed spike aerator (45-0458) achieves thorough soil-penetration and covers a substantial area efficiently.

The Core Aerator (45-0474) penetrates far more deeply than a surface aerator, ensuring water, air and nutrients reach the whole root system. The 6 Aerator plugs are rust-proof for longevity.

When moss and thatch build-up on the surface of the lawn, the supply of nutrients and water is cut off, leaving the grass discoloured and unhealthy. The Tine Dethatcher (45-0457) will loosen and lift the offending growth, allowing the turf to breathe again.



Master platform necessary for all attachments Switch from one lawn implement to another in seconds

Durable heavy gauge steel deck and welded drawbar



45-0474 53" Core Aerator

Attaches to the SmartLINK™ Master Platform in seconds without tools

Aerator features 6 rustproof aerator plugs that penetrate deeply

Durable heavy gauge steel deck

45-0458 41" Aerator Blade

SMARTLINK

Ten galvanised blades for rustproof durability Ideal for use in lightly compacted soil



45-0457 42" Dethatcher

Attaches to the SmartLINK™ Master Platform in seconds without tools

Effectively removes thatch build up for a healthier lawn

20 heat-treated spring tines for durability



WHY USE AN AERATOR?

Aeration is the process of inserting holes in the ground which opens up the soil surface to let grass roots get the air and moisture they need for healthy growth. When undertaken regularly, this process will leave you with an enviably lush and green-looking lawn.



45-0299 Plug Aerator

48" / 122 cm working width
10" / 25 cm x 4" / 10 cm solid wheels
Up to 3" / 8 cm aeration depth
Heavy duty steel construction and
weight tray

Single lever transport handle



45-0544 Spike Aerator

40" / 102 cm weight tray holds 100 lbs for excellent soil penetration

10 galvanised steel spike disks for thorough aeration

Folding hitch for easy storage 12 gauge steel is extremely durable



45-0294 Spring Tine Dethatcher

40" / 102 cm working width
20 heat treated/spring loaded tines
7" / 18 cm x 1.5" / 4 cm wheels
Single lever transport handle
Heavy duty tray and steel construction



45-0295 Spring Tine Dethatcher

48" / 122 cm working width
24 heat treated/spring loaded tines
7" / 18 cm x 1.5" / 4 cm wheels
Single lever transport handle
Heavy duty tray and steel construction



45-0545 Towed Spiker/Seeder

Rustproof poly hopper increases product life

42" / 107 cm working width

You can aerate and seed in one pass with this combined design

10 galvanised steel spike disks for throughout aeration

10" flat free tyres



WHY USE A SPREADER?

Using a spreader allows you to have the most accurate and even distribution of seeds and fertilisers, getting the job done more efficiently and quickly. Agri-Fab has a variety of tow and push spreaders with a large range of capacities. Most models include pneumatic tyres for easy manoeuvrability on any surface.



45-0566 Push Spreader

50 lbs / 23kg capacity rust-proof poly hopper Built-in deflector spreads material

Easy-to-use controls helps spread the right amount of material every time

Fold-up kickstand allows to hang on wall for easy storage

10"/25cm poly wheels move over terrain easily and never need air



45-0526 Push Broadcast Spreader

110 lbs / 50 kg Broadcast Push Spreader Polly Hopper and spreader plate are rust proof

17,500 sq ft coverage

Soft grip handles for comfortable movement

Large pneumatic tyres for easy manoeuvrability

Spreader setting recommendations for multiple materials included



45-0462 Push Broadcast Spreader

130 lbs / 56 kg hopper capacity

Professional style, easy set controls for precise application

Enclosed commercial grade gear box for smooth rolling and easy maintenance

25,000 sq ft coverage; roughly ½ acre

Large pneumatic tyres for easy manoeuvrability



45-0548 Push Spreader

130 lbs / 56 kg hopper capacity Equipped with 13" x 5" turf tread pneumatic tvres

25,000 sq. ft. coverage; approx. ½ acre



45-0530 Towed Broadcast Spreader

85 lbs / 39 kg hopper capacity

Up to 14,200 sq ft coverage; roughly 3/10 acre On/off control accessible from tractor

Up to 10 ft spread width for reliable coverage

Pneumatic tyres allow for smooth transport and easy manoeuvrability



45-0531 Deluxe Broadcast Spreader

85 lbs / 39 kg hopper capacity provides 14,000 sq ft coverage

Poly hopper and spreader plate are rust proof Easy to reach flow control lever

Up to 10ft spread width

Spreader setting for multiple materials



45-0532 85 lb Pro Push Spreader

85 lbs / 39 kg capacity provides 14,000 sq ft coverage

Poly hopper and spreader plate are rust proof

Up to 10' spread width for reliable coverage 10" pneumatic tyres allow for smooth transport

Direct rod control opens slide gate with precision

Heavy duty on/off control lever



45-0463 Tow Broadcast Spreader

130 lbs / 56 kg capacity provides 25,000 sq ft coverage

Professional style, easy set controls for precise application

Enclosed commercial grade gear box for smooth rolling and easy maintenance

Large pneumatic tyres for easy manoeuvrability



45-0329 ATV Spreader

175 lbs / 79 kg capacity provides 40,000 sq ft coverage

Large poly hopper and spreader plate are rust proof

10' / 304 cm to 12' / 366 cm spread width 15" / 38 cm x 6" / 15 cm pneumatic turf tyres with ball bearings

Spreader settings for multiple materials



45-0527 Tow Broadcast Spreader

110 lbs / 50 kg Broadcast Tow Spreader provides 17,500 sq ft coverage

Smooth powder coated frame

Poly Hopper and spreader plate are rust proof

Large pneumatic tyres for easy manoeuvrability

Spreader setting recommendations for multiple materials included



45-0288 Tow Drop Spreader

175 lbs / 59 kg Drop Spreader

Can cover up to 40,000 sq ft roughly 1 acre

Ideal for seeding and the application of granular herbicides

Hopper is made from rust-resistant poly for a longer working-life

Galvanised steel agitator for even more durability

Pneumatic tyres improve manoeuvrability



WHY USE A ROLLER?

Tow behind rollers are ideal whether you're looking to bed-in freshly laid turf, level-out mole hills, flatten frost-heaves or pack-down newly sown seed.



45-0216 Steel Lawn Roller

48" / 122 cm wide with 24" / 60 cm diameter
Welded seam steel construction for
strength and durability

Drum capacity of 910lbs (water)



45-0267 Push / Tow Roller

 $24^{\prime\prime}$ / 60 cm wide with 18 $^{\prime\prime}$ / 46 cm diameter Poly construction for rust proof durability

Drum capacity 250 lbs (water) Lightwieght when empty, for easy

transport and storage Removable fill plug



45-0268 Tow Roller

36" / 92 cm wide with 18" / 46 cm diameter 400 lbs / 181 kg weight with water Less than 50 lbs / 23 kg without water for

easy storage and transport

Removable fill plug

Poly drum is rust proof



45-0269 Tow Roller

 $48^{\prime\prime}$ / 122 cm wide with 18 $^{\prime\prime}$ / 46 cm diameter 550 lbs / 249 kg weight with water

Less than 60 lbs / 27 kg without water for easy storage and transport

Removable fill plug Poly drum is rust proof



WHY USE A SPRAYER?

Liquid fertilisers, herbicides and pesticides are convenient and effective for large lawn applications. Agri-Fab sprayers are available in two sizes: 15-gallon or 25-gallon. Both models include a hand wand for targeted spraying around trees and bushes, smooth rolling wheels for easy manoeuvrability and are compatible with ride-on lawn mowers from any manufacturer.



45-0292 Tow Sprayer

12 volt / 7 amp pump with battery connection wires inc.

68 ltr / 15 gallon tank capacity 80" / $203 \ \text{cm}$ spray width using boom

15' / 457 cm coiled hose with spray wand 10" / 25 cm x 4" / 10 cm solid wheels

45-0293 Tow Sprayer

12 volt / 7 amp pump with battery connection wires inc.

114 ltr / 25 gallon tank capacity 80" / 203 cm spray width using boom

15' / 457 cm coiled hose with spray wand 13" / 33 cm x 4" / 10 cm pneumatic wheels

WHY USE A SWEEPER?

Using a lawn sweeper to clear away leaves, grass clippings and garden debris is quicker and easier on you and your lawn than using a rake.



45-0546 Tow Lawn Sweeper

Versatile, easily and quickly attaches to all tractors

Infinite height adjustment

26 cu ft bag capacity

(6) 10" diameter brushes provide more ground contact than other models

Widest working width in the industry



45-0492 Tow Smart Sweeper

44" / 112 cm working width

One-Button brush height adjustment

25 Cu. ft. hopper capacity Offset hitch

Collapsible for easy storage

Exclusive, patent pending ergonomic dumping mechanism

Collector can ge emptied from the driver seat



45-0218 Push Lawn Sweeper

26" / 66 cm working width

Rust proof and easy to clean

Infinite height adjustment

6.2 cu ft hopper capacity

4.5 to 1 brush to wheel turn ratio

4 x 10" / 25 cm diameter replaceable

10" / 25 cm x 1.75" / 4 cm semi-pneumatic tyres

Steel tube handle

WHY USE A TRAILER?

All Agri-Fab trailers are built to last and made to efficiently and easily carry the load. They are practical and sturdy with pneumatic tyres for easy manoeuvrability on any surface. All the trailers are supplied with a universal hitch-pin, compatible with all makes of ride-on mowers and garden tractors.



45-0554 ATV/UTV Steel Trailer

350lb / 159kg dumping capacity Versatile hitch attaches to ATV/UTV or tractor

Trailer bed swivels up to 110° for precise dumping

Removable tailgate

18"/45 cm x 9.5"/24 cm all terrain pneumatic tyres with roller bearings

29"/74cm x 27.75"/70cm x 9"/23cm hed size



45-0552 700lb Utility Poly Trailer

Hold up to 12 cu.ft. (heaped)

Universal hitch that attaches to most tractors

Trailer bed swivels up to 110° for precise dumping

Heavy duty latch system to dump efficiently

15"/38cm x 6"/15cm turf tread pneumatic tyres for easy manoeuvrability



45-0553 1000lb Utility Poly Trailer

Hold up to 18 cu.ft. (heaped)

Universal hitch that attaches to most tractors

Trailer bed swivels up to 110° for precise dumping

Heavy duty latch system to dump efficiently

16"/41cm x 6.5"/16cm turf tread pneumatic tyres for easy manoeuvrability



45-0555 4 wheel Trailer

1200lb / 544 kg load capacity Converts between tow and pull quickly

and easily Heavy duty latch system for efficient dumping

13"/33cm x 4"/10cm knobby tread tyres to roll over grass



45-0519 Tow Dump Trailer

800 lbs / 363 kg load capacity

Foot operated lever release dump

Large turf tyres

Di-chromate hardware resist rust

Poly bed is quiet and rust proof

mechanism

1" / 2.5 cm diameter axle

Removable tailgate



45-0533 Tow Trailer

650 lbs / 295 kg load capacity

Unloads and dumps heavy materials in one easy trailer motion

Durable trailer cleans up easily 16"/37 cm x 4" / 10 cm pneumatic tyres Quick and easy assembly



45-0303 Tow Utility Dump Trailer

350 lbs / 159 kg load capacity 32.5" / 82 cm (W) x 49" / 124 cm (L)

x 12" / 30 cm (H) bed

Scratch resistant, powder coat paint finish

Reinforced tailgate guides for added strength

Di-chromate hardware resist rust 13" / 33 cm x 4" / 10 cm pneumatic rib tyres Easy single lever release dump mechanism



45-0345 Push Dump Trailer

750 lbs / 340 kg load capacity

Poly bed is quiet and rust proof

30.5" / 77 cm (W) x 41" / 105 cm (L) x 11" / 28 cm (H) one piece bed

Di-chromate hardware resists rust

5/8" / 1.5 cm diameter axle 14" / 36 cm x 4" / 10 cm pneumatic rib tyres

14" / 36 cm x 4" / 10 cm pneumatic rib tyres Easy single lever release dump mechanism

45-0101 Tow Utility Dump Trailer

750 lbs / 340 kg load capacity

32.5" / 82 cm (W) x 49" / 124 cm (L)

x 12" / 30 cm (H) bed

Removable tailgate

Reinforced tailgate guides for added strength

Smooth black powder coat paint finish



KEY BENEFITS

- Scarifier shaft with fixed double tines for efficient results
- Additional dethatcher shaft included
- Catcher bag included
- Central tine adjustment
- Fully foldable ergo-handle
- Remote transport position lever



SCARIFIERS

WHY SCARIFY?

Twice a year - ideally a dry day in spring or autumn - you should free your lawn from moss so it can breathe again. The moss layer is a breeding ground for fungi, it binds moisture and inhibits powerful root growth of your lawn. Lawnflite has a selection of scarifiers, which will fulfil your needs.

ELECTRIC SCARIFIER

The powerful electric scarifier is lightweight and efficient. An ideal solution for small and medium sized lawns, it comes with a catcher bag and is designed for intuitive handling. The fixed tines take up moss and thatch with ease leaving a healthy lawn ready for growth.

PETROL SCARIFIERS

With our petrol scarifiers you have a machine with 15 or 16 blades. The working depth can be selected by adjusting a lever mounted on the handle, ensuring you select the correct setting for light scarification, or heavier verticutter applications without requiring the use of tools.

Fixed tines made of special hardened steel are effective at scarifying while the large rear mounted collector catches the raked-out material, making this a one pass operation.





*2 years for domestic providing the machine is serviced by the supplying dealer.

SCARIFIERS





Model	SMART 30VE
Working width	30 cm / 12"
Engine	1,200 W / 230 V electric motor
Deck material	Polypropylene
Tines	10 double, 145 mm diameter
Tine adjustment	0 to -12 mm
Tine shaft depth	5 positions, central
adjustment	5 positions, central
Deflector shaft	Standard
Grass bag	35 ltr
Wheels (f/r)	200 mm / 110 mm
Handle	Straight, foldable
Cable guide	Standard
Measurements (approx.)	L89 / W 58 / H 100 cm
Weight (approx.)	11 kg
LpA/LwA/LwAg (dB)	86 / 97 / 99



Model	OPTIMA 35VO
Working width	35 cm / 14"
Engine	MTD ThorX 35H / 123 cc
Rated power (kW / min ⁻¹)	2.3 / 3,500
Deck material	Steel
Tines 15, 190 mm diameter	
Tine adjustment	0 to -15 mm
Tine shaft depth adjustment	6 positions, central
Deflector / Aerator shaft	Standard
Grass bag	45 ltr
Wheels (f/r)	200 mm / 200 mm
Handle	ErgoHandle, fully foldable
Measurements (approx.)	L34 / W 58 / H 114 cm
Weight (approx.)	37 kg
LpA/LwA/LwAg (dB)	86 / 98 / 100

Both electric and petrol models come standard with scarifier and aerator shaft.

MODELS AVAILABLE













Model	OPTIMA 38VO
Working width	38 cm / 15"
Engine	MTD ThorX 55H / 179 cc
Rated power (kW / min ⁻¹)	3.0 / 3,500
Deck material	Steel
Tines	16, 190 mm diameter
Tine adjustment	0 to -15 mm
Tine shaft depth adjustment	6 positions, central
Deflector / Aerator shaft	Standard
Grass catcher	50 ltr
Wheels (f/r)	200 mm / 200 mm
Handle	ErgoHandle, fully foldable
Measurements (approx.)	L34 / W 58 / H 114 cm
Weight (approx.)	39 kg
LpA/LwA/LwAg (dB)	87 / 98 / 100



MANTIS - EXPECT BIG THINGS

Mantis tillers and cultivators are designed for performance and power. Mantis introduced the first small tiller nearly 40 years ago and remain at the forefront in providing big results from a mini tiller. The range will help you grow great gardens and keep lawns looking the best. Trusted by over 2 million gardeners they are the best selling small tillers ever.

A full range of attachments including border edge, plough, aerator and planter furrower are also available.

WHY CHOOSE A MANTIS TILLER?

THE LIGHTEST AND MOST POWERFUL TILLER IN THE WORLD

Small but powerful, the Mantis tiller will surprise you with its performance. Thanks to its unique curved tines, it defies roots and stones, reduces clods and turns the soil to create great planting conditions.

FAST AND EASY TO USE

With the Mantis tiller you will save a lot of time in the garden. Plus, it's easy to start and with all of the controls at your fingertips, is easy to use.

EASY TO HANDLE AND POWERFUL

That's the magic of a Mantis. A compact size that works in the tightest spaces, a light weight tiller that is easy on your arms and back and a 40-year reputation for quality and efficiency.

VERSATILE

A Mantis tiller is several tools in one: it digs, hoes and weeds. With the optional attachments, it also breaks up the ground, digs furrows and holes, helps takes care of the lawn, edges borders and paths.

DESIGNED TO LAST

A Mantis is a long-term investment.

ACCESSORIES

- 1 TINE DETANGLER (Model 1322)
- 2 HANDY ITEM KIT FOR SV4 2 STROKE ENGINE (Model 1422)
- **3 6 PACK OIL 1 GAL. MIX (MODEL 1522)**
- 4 TILLING TINE SET (Model 1622)
- 5 WEED REDUCER BOXED (Model 1722)
- 6 BORDER EDGE ATTACHMENT (Model 3222)
- 7 PLOUGH ATTACHMENT (Model 3333)
- 8 AERATOR ATTACHMENT (Model 4222)
- 9 KICK STAND (MODEL 4333)
- 10 DETHATCHER ATTACHMENT (Model 5222)

Accessories are for all models starting with a 7.

- 1 PLANTER FURROWER ATTACHMENT (Model 6222)
- 12 AERATOR/DETHATCHER COMBO (Model 7321)
- 13 CREVICE CLEANER ATTACHMENT (Model 8222)
- **14 WHEEL SET** (Model 9222)
- 15 HANDY ITEM KIT FOR HONDAGX25 25CC ENGINE [Model 3777]
- TILLER STORAGE RACK
 Whilst stocks last (Model 811005)
- HANDY ITEM KIT FOR SV6 2 STROKE ENGINE Whilst stocks last (Model 5444)

TILLERS AND CULTIVATORS

MODELS AVAILABLE

HONDA


Model	7263 CLASSIC	7265 DELUXE	7265 DELUXE
Tilling width	23 cm / 9"	23 cm / 9"	23 cm / 9"
Engine	Honda 4 cycle, 25 cc	Honda 4 cycle, 25 cc	Honda 4 cycle, 25 cc
Speed	Variable throttle	Variable throttle	Variable throttle
Handle	Sure grip	Sure grip	Sure grip
Kick stand	Included	Included	Included
Weight (approx.)	11 kg	11 kg	11 kg
Engine guard and handle	-	Standard	Standard
Border edge attachment	-	-	Included





KEY BENEFITS

- WORM GEAR TRANSMISSION
 Produces smooth, reliable power delivery
 with no mechanical efficiency loss
- TINE GEOMETRY
 Specially designed tines maximise digging
 power, creating the ideal soil for root and
 plant health
- 3 ENGINE-OVER-TINE DESIGN
 Optimises weight placement for better
 digging power and less stress on the
 operator





MANTIS BATTERY / ELECTRIC TILLERS AND CULTIVATORS

MODELS AVAILABLE

Model	7252 ELECTRIC
Tiller width	23cm / 9"
Motor	230V electric
Start	Push button
Speed	3 speed throttle
Emissions	ECO-friendly
Weight (approx.)	9.5 kg
Kickstand	Included





3450 ELECTRIC CULTIVATOR
31 cm / 12"
1000w electric
Push button
2 speed
ECO-friendly
11 kg

Model	3458 58V BATTERY CULTIVATOR				
Tiller width	31 cm / 12"				
Battery	58V Lithium-ion				
Running time	Up to 30 minutes on a full charge				
Battery and charger	Included				
Speed	2 speed motor				
Emissions	ECO-friendly				
Weight (approx.)	12 kg				



KEY BENEFITS

- FOLD DOWN HANDLE
 For convenient storage in the garage or shed
- RETRACTABLE MULTI-POSITION WHEELS 3 position wheels are handy for transport. Plus they adjust for controlling cultivating depth or stow conveniently out of the way
- 3 STEEL POWER TROWEL TINES Impressive tilling and weeding performance from 16 sturdy steel power trowel tines
- 2 SPEED MOTOR
 Delivers the right power for the job



MAKE COMPOST IN 3 EASY STEPS WITH A MANTIS COMPOSTUMBLER

HOW MANTIS COMPOSTERS WORK

Thanks to the Mantis ComposTumbler's unique design, it's quick and easy to create high-quality fertiliser from your kitchen and garden waste. Our composter models, designed for different household sizes, use the same technology to deliver the best results. Here's how it works.

1. COLLECT ORGANIC WASTE

Simply collect a variety of organic waste materials from your property and garden. Put them in your ComposTumbler composter, close the door, and immediately give the tumbler 5 turns.

2. TUMBLE YOUR COMPOST

Give the tumbler 5 turns every day. No heavy lifting!

3. FINISHED COMPOST IN ONLY A FEW WEEKS!

Open the door and tumble out your finished compost.







COMPOSTING TIPS

- Be sure the mix of ingredients you put in your tumbler contains wastes high in nitrogen and carbon for a good balance.
- Do not attempt to make compost using any products that have been treated with chemical fertilizers or pest control products.
- If you have bulky items to compost, such as corn cobs, melon rinds, and shrub clippings, be sure to run them through a shredder or chop up the material into smaller pieces before putting them your tumbler. Larger items take longer to break down.

WHAT YOU CAN COMPOST

You can add almost any organic material to your compost, and in small quantities you're unlikely to upset the balance of 'greens' and 'browns'.

We give you a free guide to composting with your new Mantis ComposTumbler.

These are just a few of the things you can turn into quality fertiliser:

- Fresh Grass Clippings
- Shredded Leaves
- Kitchen Trimmings and Peels from Vegetables and Fruits
- Sawdust
- Garden Throwouts such as dead flowers and plants
- Weeds (Yes! The temperature inside the ComposTumbler gets hot enough to kill the weed seeds!)

- Manure from horses, cows, chickens, rabbits, pigs or sheep. (Do not attempt to compost any wastes from dogs or cats.)
- Black-and-white sections of newspapers
- Egg cartons
- Rotted fruits and vegetables
- Pine Needles
- Coffee Grounds
- Tea Leaves or Tea Bags



PORTABLE COMPOSTER ROLLS DIRECT TO THE GARDEN

MAKES COMPOST IN 4 TO 6 WEEKS

The Back Porch ComposTumbler was developed for garden composting. If you have a city property or a very small garden, this little composter was designed just for you. The frame includes two wheels so you can take the compost right to your flower beds and garden areas. You can add to it each day for continuous composting.

CT08001 BACK PORCH COMPOSTUMBLER
140 litres
37"/94cm H x 31"/79cm W x 26"/66cm D
7"/18cm off the ground
Double-wall, high density polyethylene with insulating air cell
Polyester powder-coated black steel tubing, with two wheels
Aerator/drainage unit on the bottom
Screened vents on each side
Indented grooves on drum allow grip for turning
Sage green
Some assembly is required



KEY BENEFITS

- HOLDS UP TO 140 LITRES OF MATERIAL to make plenty of compost for smaller gardens and flower boxes
- TURNING GROOVES let you grip the drum to turn it
- AERATOR/DRAINAGE UNIT on the bottom combined with screened vents on each side allow the proper air intake and the release of excess moisture, without spilled compost
- INSULATED HIGH-DENSITY polyethylene drum lets you compost in cooler weather
- CONVENIENT WHEELS let you take the compost directly to your flower beds and garden areas



COMPACT COMPOSTUMBLER PERFECT FOR SMALL TO MEDIUM GARDENS

MAKES COMPOST IN AS LITTLE AS 14 DAYS!

The Compact ComposTumbler was developed in the 1990's specifically for home composting by suburban gardeners and homeowners who garden on smaller properties. This composter has all the same quality and speed of the bigger model, with half the capacity.

Model	CT02001 COMPACT COMPOSTUMBLER
Drum capacity	335 litres
Size	43"109cm H x 42"/107cm W x 33"/84cm D
Drum height	12"/30cm off the ground
Drum materials	Powder-coated galvanised steel, rust-resistant
Frame	Tubular steel with black powder-coated finish
Drainage	Aerator/drainage unit on the door
Air Circulation	Screened vents on the end caps
Turning	Gear-driven handle on frame
Colour	Sage green
Assembly	Composter is delivered in boxes and requires assembly using basic tools



KEY BENEFITS

- HOLDS UP TO 335 LITRES OF MATERIAL to make plenty of compost for medium size gardens
- 2 CONVENIENT, gear-driven, easy-to-spin handle makes it easy to turn even a fully loaded drum
- 3 AERATION/DRAINAGE UNITS on the door allow the proper air intake for oxygen-hungry bacteria and the release of excess moisture, without spilled compost
- 4 INTERIOR MIXING FINS ensures thorough mixing as you turn the drum. Prevents material from sticking to the sides. Produces faster decomposition
- 5 STURDY, powder-coated galvanised steel wall construction is rust resistant, gives long-lasting use batch after batch





WHEELED TRIMMER

When the mowing gets rough, you need a machine that meets the tough demands of rough grass where unknown debris may be lurking. The HWLT wheeled trimmer with its dual line cutting system, large wheels, adjustable handle system, will wade through the rough areas.





SHREDDER

Cut your garden waste down to size and reduce the number of trips to the local tip. The Lawnflite shredder is available with a petrol engine for larger gardens and when working away from a power source.

The advanced unique self-feeding cutting system reduces down garden debris to a manageable size, producing high volume output without jamming. The large infeed top hopper accepts any shape of branches with or without leaves and a rapid blade changing system allows for quick changes when needed. The cast aluminium cut chamber helps reduce noise and a large capacity mulch catcher collects up to 45 ltres in one go.

Designed and built to be user friendly, this shredder will reduce clippings and debris in no time.

KEY BENEFITS

- 1 Advanced self-feeding cutting system
- 2 Rapid blade changing system
- Large infeed hopper accepts branches with and without leaves
- 4 Reduced running noise from large cast aluminium cut chamber
- 5 Large 45L collection box



ELONCINPETROL



Model	PGS45
Power	Loncin 196 CC OHV
RPM	3,600
Max. diameter wood	4.5 cm / 2"
Hopper size	340 mm
Cone cutting diameter	200 mm
Blades	HSS blades with rapid change
Blade size	45 ltr
Wheels	10" wheels



GTM - WOOD CHIPPERS AND TREECARE

Our range of compact and powerful wood chippers are designed to offer a portable option to chipping branches and crops - perfect for tree care, landscaping, forestry and garden maintenance.

Efficient, effective and safe to operate due to their chipping system and unique drum design - a rotor with 2 blades, one counter blade and ejection through a large discharge chute. The system pulls branches up to 12 cm thick into the machine, chips them and ejects clean cut wood chips time after time. The chipped material is ideal to use as mulch or compost.

GTM Professional wood chippers and treecare for expert gardeners and professionals.

GTS 600

Powerful chipper for private users.

Branches with a diameter up to 5 cm (2") are easily pulled in and chipped. The GTS600 comes with double sharpened blades that last twice as long as regular blades.

The machine has several safety features including restart protection for the user and overload and overheat protection for the motor.

Compact storage mode: the hopper can be put straight up and the output chute can be stored in the hopper.

Model	MSGTS600G
Engine	196 cc Loncin
Branch diameter	5 cm / 2"
Input height	113 cm / 44"
Input dimensions	25 x 25 cm / 9.8" x 9.8"
Output height	81 cm / 32"
Output direction	Rear
Deflector	85º adjustable
Safety items	Rotor blocking system / Emergency button
Wheel diameter	26 cm / 10.2"
Wheels	Plain bearings
Transmission	Direct transmission
Blades	Double sharpened blades
Dimensions (LxWxH)	125 x 57 x 133 cm / 49" x 19.7" x 52.4"
Weight (depends on engine)	68 kg / 150 lbs



GTS 900

Extra wide input area for efficient processing.

The GTS900 chipper is a powerful machine for professional use in the field of tree maintenance, ground care and forestry. With an extra wide input area - 40 x 28cm (16 x 11") making it suitable for fast and efficient processing of branches up to 8cm (3").

The machine is equipped with a safety button that immediately stops the motor.

Model	MSGTS900G
Engine	302 cc Loncin
Branch diameter	8 cm / 3.1"
Input height	101 cm / 39.8"
Input dimensions	40 x 28 cm / 15.7" x 11"
Output height	138 cm / 54.36"
Output direction	Side
Deflector	80º adjustable
Safety items	Emergency switch
Wheel diameter	39 cm / 15.4"
Wheels	Ball bearings
Transmission	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	150 x 67 x 145 cm / 59.1" x 26.4" x 57.1"
Weight (depends on engine)	140-151 kg / 309 - 333 lbs



GTS900 COMPO

Multifunctional chipper for branches and grass.

The GTS900C is a multifunctional chipper with two different outputs. The high output is suitable for shredding branches up to 8cm (3"). The low output is suitable for soft materials, such as grasses, hedge shavings or plant debris. The shredded material

Model	MSGTS900C0MP0	
Engine	302cc Loncin G300FA	
Branch diameter	8 cm / 3.1"	
Input height	101 cm / 39.8"	
Input dimensions	40 x 28 cm / 15.7" x 11"	
Output height	High 138cm / 54.36", Low 35cm / 13.8"	
Output direction	Side	
Deflector	80º adjustable	
Safety items	Emergency switch	
Wheel diameter	39 cm / 15.4"	
Wheels	Ball bearings	
Transmission	Double V belts	
Blades	PRO blades	
Dimensions (LxWxH)	125 x 67 x 138cm / 49.2" x 26.4" x 54.3"	
Weight (depends on engine)	140-151 kg / 309 - 333 lbs	



SPARE PARTS AND ACCESSORIES

ITEM	NEW WOODEN PUSH TOOL (FOR MSGTS900C0MP0)	NEW WOODEN PUSH TOOL (FOR MSGTS1300COMPO/E)	SWIVEL CHUTE (FOR MSGTS1300G V3/V4)	CHUTE	(END MEGTERON V2 &	(END MEGTERING &	(EOD		BUMPER SUPPORT (FITS TO ALL MSGTS1300 MODELS)
Draduct code	CTCM110001000	CTCM110002000	CTC A D2DD22DDD	CTC A070012000	CTCD07000015	CTCAO70002000	GTSM033507000 &	CTCE11UOLIDCDI	CTCM022015000





GTS 1300

Powerful gravity-fed machine for professional use in tree maintenance, ground care and forestry.

With a maximum height of 150cm (59") and the engine sited under the hopper it is less than 80cm (32") wide making it the most compact chipper in its class.

The GTS1300 wood chipper is light and perfectly balanced so that one person can operate and move the machine safely.

Model	MSGTS1300G15
Engine	420 cc Loncin
Branch diameter	12 cm / 4.4"
Input height	110 cm / 43.3"
Input dimensions	34 x 42 cm / 13.4" x 16.5"
Output height	155 cm / 61"
Output direction	Adjustable
Deflector	85º adjustable
Safety items	Panic bar, safety switches, rotor locking system
Wheel diameter	40 cm / 15.7"
Wheels	Ball bearings
Transmission	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	155 x 77 x 156 cm / 61" x 30.3" x 61.4"
Weight (depends on engine)	210 kg / 463 lbs

GTS1300 COMPO

Multifunctional chipper for branches and grass.

The GTS1300C is a multifunctional chipper with two different outputs. The high output is suitable for shredding branches up to 10cm (4"). The low output is suitable for soft materials, such as grasses, hedge shavings or plant debris. The shredded material accelerates the composting process.

Model	MSGTS1300C0MP0	
Engine	420cc Loncin G420F	
Branch diameter	10 cm / 4"	
Input height	103 cm / 40.6"	
Input dimensions	50 x 35cm / 19.7" x 13.8"	
Output height	High 160cm / 63", Low 35cm / 13.8"	
Output direction	Adjustable	
Deflector	85º adjustable	
Safety items	Panic bar, safety switches, rotor locking system	
Wheel diameter	40 cm / 15.7"	
Wheels	Ball bearings	
Transmission	Double V belts	
Blades	PRO blades	
Dimensions (LxWxH)	203 x 77 x 160cm / 80" x 30.3" x 63"	
Weight (depends on engine)	198.5kg / 438lbs	

SPECIAL ORDER CHIPPERS				
DESCRIPTION	MODEL NUMBER			
GTS1300 Loncin G420FG E/S engine	MSGTS1300GE15			
GTS1300 On Caterpillar Tracks Loncin GTE E/S engine NEW	MSGTS1300RGE15			
GTS1300 Compo Loncin G420FD	MSGTS1300C0MP0E			
GTS1800 V5 GX630 V-twin Honda E/S engine wheel driven NEW	MSGTS1800WD			

GTS 1300RG

Powerful but compact tracked wood chipper.

The GTS1300RG wood chipper is equipped with caterpillar tracks to operate on rough and hard to access terrain, suitable for gardens, parks and forestry. The new construction can easily manage steep hills up to 20° incline.

The chassis is specially lowered, making the input height only 10cm (4") higher than the GTS1300 on wheels.



Model	MSGTS1300RG15
Engine	389 cc Loncin
Branch diameter	10 cm / 4"
Input height	125 cm / 49.2"
Input dimensions	34 x 42 cm / 13.4" x 16.5"
Output height	160 cm / 63"
Output direction	Adjustable
Deflector	85º adjustable
Safety items	Panic bar, safety switches
Wheel diameter	40 cm / 15.7"
Wheels	Ball bearings
Transmission	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	215 x 72 x 170 cm / 84.6" x 28" x 67"
Weight (depends on engine)	345 kg / 760 lbs

GTS 1300 PTO

A robust wood chipper, suitable for coupling to a tractor.

The GTS1300PTO wood chipper is suitable for chipping fresh, green wood and can be coupled to a tractor up to 45hp with a 3-point attachment and power take-off. A trailer can be attached to the back of the machine; for wood chips to be blown into directly.

The GTS1300PTO meets the highest safety standards. The safety mechanism is entirely independent of the tractor and works with any tractor.



Model	MSGTS1300P
Engine	PTO
Branch diameter	12 cm / 4.4"
Input height	110 cm / 43.3"
Input dimensions	34 x 42 cm / 13.4" x 16.5"
Output height	155 cm / 61"
Output direction	Adjustable
Deflector	85º adjustable
Safety items	Panic bar, safety switches, rotor locking system
Wheel diameter	40 cm / 15.7"
Wheels	Ball bearings
Transmission	Double V belts
Blades	PRO blades
Dimensions (LxWxH)	90 x 106 x 155 cm / 35.4" x 41.7" x 61"
Weight (depends on engine)	210 kg / 463 lbs

GTS 1300 WD

A self-propelled powerful wood chipper for professional use.

The GTS1300WD wood chipper can shred fresh cut wood with a maximum diameter of 10 cm (4")and dry wood of 8 cm (3").

The battery powered (2 x 12 V) self-propelled system has an impressive autonomy of 9.5 kms on flat paved ground and approximately 3 kms on hilly or muddy terrain. The driving system can handle slopes up to 15°.

Steering is easy thanks to the two swivelling wheels that are mounted on a swing axle so the chipper can go through rough and uneven terrain.



Model	MSGTS1300WDG15
Engine	420 cc Loncin
Branch diameter	10 cm / 4"
Input height	103 cm / 41"
Input dimensions	50 x 28 cm / 20" x 11"
Output height	163 cm / 64"
Output direction	Turnable 270°
Deflector	100º adjustable
Safety items	Rotor blocking system, panic bar, safety lever
Transmission	2 speed settings
Blades	Double grinded blades (2x)
Dimensions (LxWxH)	150 x 73 x 163 cm / 59" x 29" x 64"
Weight (depends on engine)	235 kg / 518 lbs




ELEPHANTS TRUNK HARNESS V2

The GTM Professional Elephants Trunk Harness V2 will help you to trim hedges all day long without muscle strain and double your workspeed.

The comfortable harness is worn like a backpack and reduces the weight of the hedge trimmer by 3 kg (6.5 lbs). The length can be adjusted and is suitable for hedge trimmers from 4.5 to 8 kg (10 - 17.5 lbs).

A clear view and an unlimited work area will help you to work quicker and with greater safety and improved accuracy.

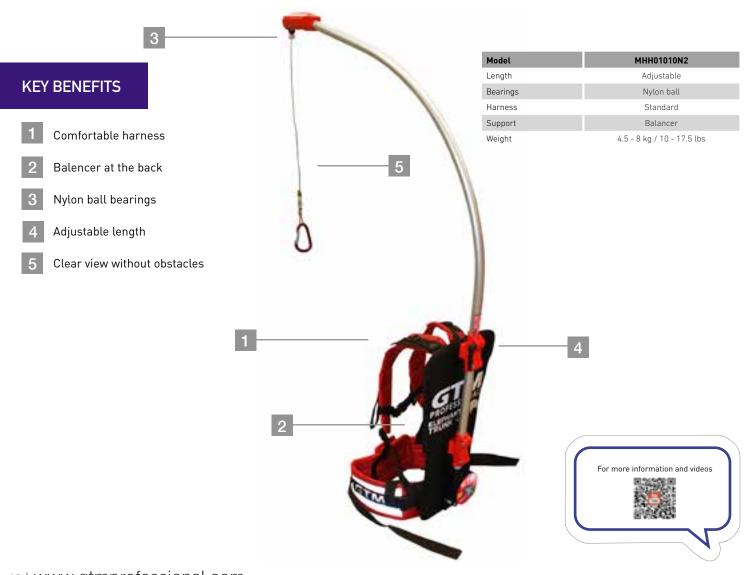





RATTLEWEDGE

The GTM Professional Rattlewedge is a patented tool that has been developed by arborists for you – to improve the security and working conditions when you are felling trees or cutting up large pieces of wood. The Rattlewedge can be inserted into the notch made in the wood and tightened up to open up the notch, allowing you to control when and where the tree will fall. The Rattlewedge helps you control the wood without any effort, whether you are in the tree or on the ground.

Made of lightweight aluminium and weighing only 1.4 kg (3 lbs), it can be easily carried up into the tree and the weight of the tree will make the task of felling that much easier and safer.





LOG SPLITTERS

Log splitters offer a safe and effort-free alternative to chopping up wood with a traditional axe.

Lawnflite offers a range of high quality electric logsplitters. For use in sensitive areas where noise will cause a problem we have electric models with a splitting force of up to 8 tonne. All Lawnflite log splitters are fitted with wheels for transportation and are operated by a 2 handed control system to ensure safe working practice.

Please note - if splitting particularly hard wood, the maximum log size stated may not be applicable.

The LS5220EH-kit and LS72300EH-kit must be used with a stand due to new safety legislation. The stand comes as standard with both machines.

KEY BENEFITS

- Electric log splitters are quiet and effective
- Splitting force from 5 to 8 tonnes
- Two handed control systems ensure a safe working practice
- Wheels for easy transportation
- Comfortable hand-grips for easier working











Model	LS52200EH-KIT	LS72300EH-KIT	LS8300EV
Engine	230 volt 2200 watt	230 volt 2200 watt	230 volt 3000 watt
Splitting force	5 tonne	7 tonne	8 tonne
Log diameter	25 cm / 10"	25 cm / 10"	30 cm / 12"
Log length	52 cm / 20"	52 cm / 20"	55 cm / 21"
Weight	55 kg	60 kg	55 kg
Stand	Standard	Standard	N/A
Wheels	Standard	Standard	Standard

ELECTRIC CHAINSAW

Our high-performance electric chainsaw is ideal for all types of sawing work around the garden which can be done within cord length. Alternatively this versatile machine can be run from a suitable generator. This includes tree trimming and the cutting-down of fruit trees, the building of an arbour in the garden, cutting firewood as well as small wood and branches.

- 1 Low vibration handles
- 2 Lightweight ergonomic design and well balanced construction
- 3 Suitable for a variety of applications from trimming and cutting firewood through to general purpose logging and tree felling







Model	ECS180035
Engine	1800 Watt electric motor
Voltage	230 Volt / 50 Hz
Bar length	35 cm / 14"
Bar manufacturer	Oregon
Chain	10 mm / 3/8" LP
Chain manufacturer	Oregon
Chain tensioner	Front
Chain oil tank	0.09 ltr
Automatic chain lubrication	Standard
Cutter guard	Standard
Weight (approx.)	4.8 kg
Vibration value body	3.0 m/s ²
LpA/LwA/LwAg (dB)	84 / 104 / 107



KEY BENEFITS

- Tight hole pattern and all-tine propulsion produces more holes for the best quality of core results
- Patented split-drive technology allows power steering through the tines
- Simple controls allow operators to aerate straight, follow curves and turn left or right
- Protective chain guards help keep grass, leaves and cores out of chains and sprockets
- Removable weight and fillable water drum add weight for greater tine penetration in tough soil

Model	TA-25DE AERATOR
Engine	Honda® GX120
Aerating width	24.375"
Aerating depth	Up to 2.75"
BHole pattern	4.06" x 7"
Coverage	32,850 sq. ft. / hr
Tines	(36) 3/4" OD
Holes / ft²	6.5 per sq. ft.
Weight bar	42 lbs removable steel bar
Dimensions (HxWxL)	48.5" x 40.5"x 50"
Dry weight	362 lbs with weight (320 lbs without)

Classen are serious about manufacturing cutting-edge, durable and easy-to-use equipment for professional landscapers and homeowners.

The full product line incorporates features that enhance operator comfort and minimise maintenance. It's their way of taking the backache out of lawn care, so you stay productive and profitable.

AFRATORS POWER STEER[™] PRO TA25

Transform gruelling muscle-work into simple fatigue-free steering and comfortably move from one lawn or local authority ground to the next with the PRO TA25 Aerator.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

BEST SUITED FOR:

Landscapers and Turf Care Professionals **IDEAL LAWN SIZE:**

Large Lawns or Local Authority



WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.



AERATORS STEERABLE COMPACT TA18

The industry's most compact aerator is also the most productive.

Classen equipment is built with the professional in mind with quality components, productivity features and service and maintenance ease.

TA18HE STEERABLE COMPACT

Honda® GX120

16"

Up to 3°

3.4" x 7

29,500 sq. ft. / hr

(30) 3/4" OD

KEY BENEFITS

- Best Quality of Core®: Five rows of tines pull 15% more cores per square foot than competitive models
- Steerable tine bank enhances manoeuvrability and eases end of row turning
- Dual front drive wheels provide exceptional balance on hills
- Fold-down handle, removable weights and side lift/tie-down brackets ease transport
- Exclusive tine engagement system greatly reduces the effort required to lower and raise tines
- Honda® GX120 engine achieves the fastest speed in its class, 4.2 mph
- Easy-access drive sprocket and bail result in simple maintenance

BEST SUITED FOR:
Homeowners and Landscapers
IDEAL LAWN SIZE:
Small to moderate



Engine

Aerating width

Aerating depth

Hole pattern

Coverage

Tines

2-YEAR WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions. ൧



AERATORS RECIPROCATING RA21

Transform gruelling muscle-work into simple fatigue-free steering and comfortably move from one lawn or local authority ground to the next with the

The reciprocating tines of the RA21 punch clean holes in tough, hardened soil.

KEY BENEFITS

- Tines reciprocate at 450 revolutions per minute for exceptional coverage
- Lightweight design makes end of row turning easy
- Fold-down handle for compact transport and storage
- Lightweight, rust-resistant, two-piece hood reduces overall unit noise and allows easy access for maintenance
- Lifting and tie-down handles for easy and safe transportation

Front and rear tyre scrapes keep tyres free from dirt and allow maximum tine penetration

Front and rear pneumatic wheels offer better flotation on turf and easier manoeuvrability

Model	RA-21HE RECIPROCATING
Engine	Honda® GX160
Aerating width	16.25"
Aerating depth	Up to 2.75"
Hole pattern	2.6" x 7.5"
Coverage	26,000 sq. ft. / hr
Tines	(8) 5/8" OD
Holes / ft²	10 per sq. ft.
Weight bar	N/A
Dimensions (HxWxL)	39" x 31.5"x 64"
Dry weight	261 lbs

BEST SUITED FOR:

Landscapers and Turf Care Professionals and homeowners

IDEAL LAWN SIZE:

Any size that involves straight-line aerating



Engines are warrantied separately by manufacturer. *See website for terms & conditions.

AERATOR COMPARISON CHART



Model	PRO TA25
Ideal lawn size	Large lawns, local authorities
Best suited for	Lawndscapers, lawncare professionals, local authorities and golf courses
Aerating width	24.75"
Coverage	32,850 sq. ft. / hr
Hole pattern	4" x 7"
Dry weight	164 lbs / 362 lbs



Model	TA18
Ideal lawn size	Any
Best suited for	Lawndscapers
Aerating width	16"
Coverage	29,500 sq. ft. / hr
Hole pattern	3.4" x 7"
Dry weight	116 lbs / 257 lbs



Model	RA21
Ideal lawn size	Any size involving straight-line aerating
Best suited for	Lawndscapers and homeowners
Aerating width	21"
Coverage	26,000 sq. ft. / hr
Hole pattern	2.6" x 7.5"
Dry weight	118 lbs / 261 lbs

2-YEAR WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.

ட



TURF OVERSEEDERS HYDRO-DRIVE PRO HTS20

Place more seed rows in less time with the self-propelled PRO HTS20 Overseeder. Our industry-best 13 double-bladed shafts spaced 1.5 inches apart provide carpet-like coverage on the bumpiest terrain.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

KEY BENEFITS

- SINGLE-HANDED CONTROL provides ease of operation in forward and reverse
- FOLDING HANDLE means more space is available on your
- TURF TREAD FLOTATION TYRES provide exceptional balance and stability on hills, reduce soil compaction and eliminate tyre ruts
- SEED DIAL AND ON-BOARD INSTRUCTION CHART allows operators to set the overseeder for the desired grass seed type, eliminating wasted seed
- 26 HEAT-TREATED MULTI-PURPOSE BLADES uniquely designed with a cutting edge on both ends of the blade, provide double the blade life
- 40 lbs FLOATING SEED BOX follows bumpy terrain or locks in place at 10 depth settings for seeding on hills

Model	HTS-20HE
Engine	Honda" GX270
Transmission	Hydrostatic, Hydro-Gear® T2
Seeding width	20"
Seeding blade	Double edged, heat treated blades, 1.5" spacing
Seedbox capacity	40 lbs
Dimensions (HxWxL)	45" x 31"x 57"
Dimensions (handle folded)	33" x 31"x 45.75"
Dry weight	300 lbs



Landscapers and Turf Care Professionals **IDEAL LAWN SIZE:**

Large or local authorities



WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.



TURF OVERSEEDER WALK-BEHIND TS 20

Seed new lawn, overseed an existing lawn or easily convert the TS20 into a turf rake or vertical cutter for additional turf care projects. The blades feature a cutting edge on both ends, which doubles the blade life.

KEY BENEFITS

- I INDUSTRY'S TIGHTEST BLADE PLACEMENT allows for better germination by planting 13 rows per 20" swath
- FOLDING HANDLE means easy transportation
- t 5-POSITION HEIGHT ADJUSTMENT gives optimal depth control
- EASY TO REMOVE SEED BOX allows for simple cleaning
- t TYRE SCRAPES reduce soil build-up
- 1 26 HEAT-TREATED MULTI-PURPOSE BLADES re-reversible and sharpened on all four edges for double the blade life
- CONVERTS TO A TURF RAKE or vertical cutter in minutes with optional blade assemblies

Model	TS-20HE
Engine	Honda® GX160
Seeding width	20"
Seeding blade	Double edged, heat treated blades, 1.5" spacing
Seedbox capacity	30 lbs
Dimensions (HxWxL)	395" x 27"x 51"
Dimensions (handle folded)	29.5" x 27"x 30.5"
Dry weight	150 lbs

BEST SUITED FOR: Homeowners and Landscapers IDEAL LAWN SIZE: Small to moderate





SOD CUTTERS HYDRO-DRIVE PRO HSC18

Maximise productivity for any application big or small with the PRO HSC18 Sod Cutter. Whether you are repositioning or relocating sod or expanding landscaping areas, the hydrostatic drive delivers high productivity with smooth power in both forward and reverse and the industry's fastest transport speed.

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

KEY BENEFITS

- POWERED FORWARD AND REVERSE with industry-best 4.7 mph transport speed
- INTEGRATED THROTTLE/CLUTCH CONTROL ON HANDLE results in simple operation; releasing the handle puts the machine into idle
- ADVANCED VIBRATION DAMPENING SYSTEM and NEW modified cam design provides enhanced operator comfort even with extended run times
- INTEGRATED REAR SWIVEL WHEEL provides turning ease and locks in place for straight-line cutting
- KNOBBY TREAD DRIVE WHEELS grip the turf better and reduce dirt buildup
- 18" BLADE STANDARD. Optional blade assemblies include 12", 16", 20" or 24" (24" blade available for GX240 engine model only)

BEST SUITED FOR:

Landscapers and Turf Care Professionals **IDEAL LAWN SIZE:**

Model	HSC185E
Engine	Honda® GX160
Transmission	Hydrostatic, Hydro-Gear® T2
Cutting width	18"
Cutting depth	Up to 2.5"
Cutting speed	1200 strokes per minute
Dimensions (HxWxL)	12" x 16"x 20"
Dimensions (handle folded)	38" x 24.5"x 52"
Dry weight	330 lbs

Model	HSC188E
Engine	Honda® GX240
Transmission	Hydrostatic, Hydro-Gear® T2
Cutting width	18"
Cutting depth	Up to 2.5"
Cutting speed	1200 strokes per minute
Dimensions (HxWxL)	12" x 16"x 20" & 24"
Dimensions (handle folded)	38" x 24.5"x 55"
Dry weight	363 lbs





Easy-to-operate thanks to user-friendly controls and quick view how-to panel

DESCRIPTION	MODEL NUMBER	
SOD CUTTER ACCESSORIES		
Swivel wheel kit (Fits all SC & SCHV sod cutters)	C900046	
Blade conversion 18" TO 12"	C900014	
Blade conversion 18" TO 16"	C900037	
Blade conversion 18" TO 20"	C900007	
Blade conversion 18" TO 24"	C900019	
(ABOVE BLADE ACCESSORIES WILL ALL WORK ON THE GX240 ENGINE MODEL SOD CUTTERS, HOWEVER, C900019, BLADE CONVERSION 18" TO 24" IS NOT SUITABLE ON THE GX160 ENGINE MODEL SOD CUTTERS)		



KEY BENEFITS

- VARIABLE SPEED from 0 to 3.4 mph for greater productivity
- 5-POSITION, SINGLE-ACTION HEIGHT ADJUSTMENT LEVER moves in 1/4" increments for optimal depth
- 28 HEAT-TREATED FLAIL BLADES with spacing of 11/16" standard, adjustable up to 1-3/8" for greater flexibility
- FOLD-DOWN HANDLE makes hauling and stowing simple
- HYDROSTATIC DRIVE TRANSMISSION makes for fast manoeuvring on hills and slopes by saving the operator from intense muscle-work
- WHEELS WITH SEALED BEARINGS withstand challenging conditions and semi-pneumatic tyres smoothly move the unit across the turf

Model	TRS-20HE
Engine	Honda® GX160
Transmission	Hydrostatic, Hydro-Gear* T2
Operating width	20"
Blade/reel type	Flail
Dimensions (HxWxL)	12" x 16"x 20" & 24"
Dimensions (handle folded)	38" x 24.5"x 55"
Drv weight	215 lbs

TURF RAKES HYDRO-DRIVE PRO TRS20

Dethatch large areas, hills and gradients easily with the PRO TRS20 Hydro-Drive Turf Rake featuring a productive and fatigue-free hydrostatic drive operation. For landscapers taking on a variety of projects, the PRO TRS20 converts to a turf seeder or vertical cutter in minutes

Our PRO line offers productivity-enhancing features to help landscapers complete more projects quickly and increase profits. The PRO line's proven designs include the important extras, such as hydrostatic transmissions, anti-vibration grips and power steering.

BEST SUITED FOR:

Landscapers and Turf Care Professionals **IDEAL LAWN SIZE:**

Any



WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.



TURF RAKES WALK BEHIND TR20

Dethatch your lawn or easily convert the TR20 into an overseeder or vertical slice aerator for additional projects. The TR20 turf rake is portable and compact for easy storage.

Model	TR-20HE
Engine	Honda" GX160
Operating width	20"
Blade/reel type	Flail
Dimensions (HxWxL)	40" x 27"x 44"
Dimensions (handle folded)	29.58" x 27"x 30.5"
Dry weight	135 lbs

KEY BENEFITS

- 5-POSITION, SINGLE-ACTION HEIGHT ADJUSTMENT LEVER moves in 1/4" increments for optimal depth
- PROVIDES FLEXIBILITY by converting to a rake with catcher, turf seeder or vertical cutter in minutes
- CHOICE OF DOUBLE EDGED FLAIL BLADES OR SPRING TINE REEL for more gentle raking
- HEAVY-DUTY GREASABLE BEARINGS WITH CAST IRON HOUSINGS give added durability and easy maintenance
- SEALED BEARINGS IN WHEELS add durability while semi-pneumatic tyres provide better flotation on turf and easier manoeuvrability
- FOLD-DOWN HANDLE eases transportation and storage

BEST SUITED FOR:
Homeowners and Landscapers
IDEAL LAWN SIZE:
Small to moderate



DESCRIPTION	MODEL NUMBER
Turf Rakes Accessories	
Metal seed box assembly	C900055
Flail blade assembly	C900003
Multi-purpose blade assembly	C900026
Slicing blade assembly	C900027
Spring tine reel assembly	C900045
(ABOVE REEL ACCESSORIES INCLUDE THE COMPLETE REEL ASSEMBLED, END PLATES, BEARINGS, PULLEY, KEY AND FASTENERS)	

2-YEAR WARRANTY*

Engines are warrantied separately by manufacturer. *See website for terms & conditions.

ட



Since 1922 Little Wonder has been offering landscape and debris management equipment and now has more products than any other manufacturer in this category. They know how to use air power to move and collect debris better than anyone else.

As a professional landscaper or a dedicated DIY homeowner, you demand quality, convenience and durability. You put in long hours and expect your equipment to do the same. If your blower, vacuum and brushcutter can't perform the toughest of jobs—be it clearing, trimming, hauling and/or dumping—they are not worth your time or investment.

Little Wonder understand completely and engineer their powerful equipment to stand up to your needs, season after season.





PRO EDGER

Designed to produce clean, crisp edges quickly and efficiently—up to 90' per minute—the Little Wonder Pro Edger outperforms all others in the category. This user-friendly unit features fingertip controls for fatigue-free operation and control, making it the edger of choice among landscapers.

KEY BENEFITS

- Largest available cast iron cutter head on the market.
- 10" steel blade is sharpened on all four sides for longer blade life.

Model	6232-00-59
Engine	Honda® GX120
Displacement	118 cc
Handles	Anti-vibration grips
Cast iron cutter head	Fixed
Drive belt	Dual belts
Edging depth	Up to 4"
Fuel capacity	2.8 ltr / 3 qts
Weight	31 kg / 69 lbs



ட



KEY BENEFITS

- Optimal sized hose with adjustable handle to get debris in tight areas.
- 5-blade, serrated steel impeller technology with up to 5:1 reduction ratio.
- 40-gallon, angled bottom bag with plastic bottom reduces wear and tear.
- Lightweight and easy to manoeuvre on and off trailers/
- Throated nozzle design engineered for superior suction power.

PRO VAC SI DEBRIS VACUUMS

The Pro Vac SI delivers the suction power to clear litter and debris faster. Serrated Steel Impeller Blade Technology with up to a 5:1 reduction ratio delivers superior suction and shredding capabilities in a compact footprint.

Keep your pace going with instant easy nozzle height adjustment from the operator's position. You'll get non-stop, efficient pavement-to-turf transition for faster cleaning up.

Throated nozzle design increases airspeed for improved vacuum capability. Unique rectangular discharge chute prevents debris clogs. The optimised 40-gallon, no-kick bag design prevents wear and tear.

The optional hose kit for cleaning out flower beds and hard to reach areas sits securely in a special contoured pocket that blocks air flow when not in use.

Available in push and self-propelled versions.



PROFESSIONAL

ACCESSORIES

- 1 NOZZLE GUARDS (Except for the Pro Vac SI) 600035
- 2 SWIVEL WHEEL KIT (For 5612-00-01 only) 600040
- 3 FELT LINER KIT (Except for the Pro Vac SI) 600050
- 4 **HOSE KIT** (5" x 7' Pro Vac SI) 4179172
- 5 NOZZLE GUARDS (Pro Vac SI) 4179173

PUSH

Model	LW5511-02-59 PRO VAC Si
Engine	Honda® GX190
Displacement	187 cc
Fuel capacity	0.25 gallon
Bag design	Mesh with dust skirt (optional felt bag)
Bag capacity	40 gallon (US)
Impeller	12" dia., 5 blades, 1/4" thick
Nozzle type	Fixed
Nozzle width	27.5"
Wheels	12" rubber tread cap wheels
Hose (optional)	5" diameter, 7' long
Weight	66 kg / 146 lbs
Dimension (LxWxH)	57.5" / 27" / 43.5"
Nozzle type / width	Height adjustable, floating / 29"



Pro Vac SI shown with optional hose kit

ட



KEY BENEFITS

- Arched padded handle allows users of any height to find a comfortable operating position.
- Top-loading, 74.5-gal. capacity bag—twice that of the competition — can handle the big loads.
- Sleek design and rugged front swivel wheels make turning and following curved pavements and driveways effortless (standard on self propelled).
- Nozzle height automatically adjusts—there's no need to stop the engine to change settings to avoid 'scalping' and 'digging in' on rough terrain.
- Low 40" unit height allows for clear visibility of job sites and a better view of the front nozzle area.
- Powered to perform with a Hydro-Gear® T2 transmission and 9HP Honda® GX270 engine (Pro Vac SP only).
- Heavy-duty treaded rear drive wheels provide excellent traction on both concrete and grass (Pro Vac SP only).

PRO VAC DEBRIS **VACUUMS**

Be it bulky bottles, crushed cans, leaves, pine needles or pea-sized gravel, the Little Wonder Pro Vac doesn't discriminate.

Our industry-leading impeller housing design funnels airflow and debris of all sizes into our top-loading, 74.5-gallon capacity bag without loss of suction. So you can collect more debris per bag and spend less time emptying it.

The Pro Vac is excellent for residential cleanup, industrial applications, commercial sites and carparks and is available in push and self-propelled (shown).





Engines are warrantied separately by manufacturer. *See website for terms & conditions.

PROFESSIONAL

MODELS AVAILABLE

PUSH

Model	LW5612-00-59 PR0 VAC
Engine	B&S [®] Vanguard™
Engine displacement	6.5 hp
Fuel capacity	3.2 ltr / 3.4 qts
Bag design	Top filling, 26" diameter, single lever release
Bag capacity	8 bushel / 74.47 gallon (US)
Impeller	16 3/4" diameter, 5 blades, 1/4" thick
Transmission	N/A
Speed (f/r)	N/A
Drive wheels	12" pneumatic rear
Front wheels	10" pneumatic front
Weight	83 kg / 184 lbs
Dimensions (LxWxH)	62" x 29" x 40"
Nozzle type / width	Height adjustable, floating/ 29"
Optional hose	12'

SELF PROPELLED

Model	LW5612-12-59 PRO VAC SP
Engine	Honda® GX270
Engine displacement	270 cc / 9 hp
Fuel capacity	6 ltr / 6.4 qts
Bag design	Top filling, 26" diameter, single lever release
Bag capacity	8 bushel / 74.47 gallon (US)
Impeller	16 3/4" diameter, 5 blades, 1/4" thick
Transmission	Hydrostatic, Hydro-Gear® T2
Speed (f/r)	0-4.2 mph / 0-1.8 mph
Drive wheels	13" turf tread rear
Front wheels	Heavy-duty casters standard front
Weight	127 kg / 280 lbs
Dimensions (LxWxH)	72" x 29" x 40"
Nozzle type / width	Height adjustable, floating/ 29"
Optional hose	12'

Dump valve allows for easy manoeuvrability when the engine is not engaged.

5-blade impeller reverse inclined for superior suction.



Optional 12' Hose Kit Item LW600020





Д



KEY BENEFITS

- Powerful 7- or 9- blade fan and steel impeller produces high airflow while the scrolled housing allows uninterrupted air intake. Even if a portion of the housing is covered with leaves and debris, airflow can still enter the impeller area and be forced out the discharge chute.
- Curved aerodynamic inlet draws air in smoothly for constant power and helps avoid clogging even if leaves are sucked in.
- Strong, ergonomic adjustable handle with anti-vibration grip for added comfort.
- Remote chute deflector control allows you to adjust the split-stream air deflector from the operator's position.
- Split-stream air deflector moves piles of leaves further and faster without blow-back. You'll only have to go over the area once.
- Integrated front/side discharge allows you to expel the air from the front of the unit or out the side without tools.
- Optional swivel wheel kit, easy to install, for 360° turning and control. Wheel can also lock into a straight position. Minimises wear and tear on tyres.

OPTIMAX™ BLOWERS

Little Wonder Optimax™ maximum output blowers are perfect for moving leaves, debris and standing water — or for any job that requires hurricane-force air.

All models feature a split-stream air deflector, which minimises "blow-back", and adjustable, ergonomic handles with anti-vibration grip for operator comfort.

Add a transport bracket for convenient tie-down and an industry-leading 5-year warranty, and you'll see why Optimax is the only blower you need.

Available in a variety of push and self-propelled models (LB270H-SP shown).



Optional swivel wheel kit, easy to install, for 360° turning and control. Wheel can also lock into a straight position. Minimises wear and tear on tyres





5-YEAR WARRANTY* Engines are warrantied separately by manufacturer. *See website for terms & conditions.

PROFESSIONAL

MODELS AVAILABLE



Model	LB270H / LB270H-SP
Product No.	9270-02-01 / 9270-12-01
Variable speed forward	0 - 4.1 mph (SP only)
Variable speed reverse	0 - 2.5 mph (SP only)
Transmission	Variable speed belt-powered chain drive, open centre differential (SP only)
Engine	Honda® GX270
Displacement	270 cc
Fuel capacity	5.3 ltr / 1.4 gallon
Impeller (diameter, type)	17", 7-blade steel, reverse angle
Discharge chute area	25.8 sq. in.
Air volume	2260 cfm
Air speed*	143 mph
Integrated front / side discharge	yes
Air flow control	Remote
Front tyres	10" pneumatic tyres with tube
Rear tyres	
Handle	Ergonomic 2-position adjustable; anti-vibration grip
Housing	Continuously-welded steel; 1 piece engine keck
Dimensions (H xW x L)	43" x 28" x 58"
Weight	64 kg / 142 lbs / 91 kg / 202 lbs

Model	LB390H / LB390H-SP
Product No.	9390-02-01 / 9390-12-01
Variable speed forward	0 - 4.1 mph (SP only)
Variable speed reverse	0 - 2.5 mph (SP only)
Transmission	Variable speed belt-powered chain drive, open centre differential (SP only)
Engine	Honda® GX390
Displacement	389 сс
Fuel capacity	6.0 ltr / 1.6 gallon
Impeller (diameter, type)	17", 7-blade steel, reverse angle
Discharge chute area	25.8 sq. in.
Air volume	2530 cfm
Air speed*	160 mph
Integrated front / side discharge	yes
Air flow control	Remote
Front tyres	10" pneumatic tyres with tube
Rear tyres	
Handle	Ergonomic 2-position adjustable; anti-vibration grip
Housing	Continuously-welded steel; 1 piece engine keck
Dimensions (H xW x L)	43" x 28" x 58"
Weight	76 kg / 168 lbs / 103 kg / 228 lbs

SWIVEL WHEEL KIT 9050-00-01



ட



HYDRO BRUSHCUTTER

The Little Wonder Hydro Brushcutter navigates through weeds, heavy brush and overgrown vegetation with ease. Our tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick.

Our welded steel frame design and engine positioning provide excellent balance regardless of the terrain.

And, unlike the competition, our hydrostatic transmission offers infinitely-variable, clutch-less speed selection—up to 4.2 mph forward and 1.7 mph reverse. So you can cut your own path at your own pace.


KEY BENEFITS

- Ergonomic control system with forward / reverse and blade engagement levers positioned at handle grips.
- Solid rods connect the operator to the transmission, park brake and cutter blade clutch—no cables to break or adjust.
- Single belt pulley system.
- 1" diameter mower blade spindle is supported by top and bottom sealed ball bearings inside a machined steel hub.
- Tempered spring steel 26" blade cuts tall weeds, brush and saplings up to 2" thick.
- Adjustable 1.5" wide, .25" plate steel skid shoes provide excellent flotation over rough terrain.
- 16" foam-filled no-flat, puncture-proof bar tread tyres for excellent traction and ground clearance on rough terrain.
- 7-, 10- and 12-gauge welded steel engine base, cutting deck, rear frame and control handle construction holds up to the toughest conditions.

Model	5126-22-59 HYDRO BRUSH CUTTER
Product discription	Hydro BRC-26 Honda"
Engine	Honda®GXV390
Displacement	390 cc
Fuel capacity	2.1 ltr / 2.2 qts
Transmission	Hydro-Gear® T2® Transaxle
Transmission type	Integrated hydrostatic pump / motor
Axle	.75" solid steel
Park brake	Standard
Differential lock	Open
Ground speed - forward	Infinitely-variable, 0-4.2 mph
Ground speed - reverse	Infinitely-variable, 0-1.7 mph
Cutting blade	26" (0.25" thick)
Spindle / bearings	1" diameter / Dual sealed ball bearing
Overall width	30° (32" at the handles)
Cut height / capacity	3" - 5" / Saplings up to 2" diameter
Tyres	16" x 4.8 - 8 puncture-proof, bar treat, foam-filled
Unit weight	183 kg / 405 lbs



Engines are warrantied separately by manufacturer. *See website for terms & conditions.

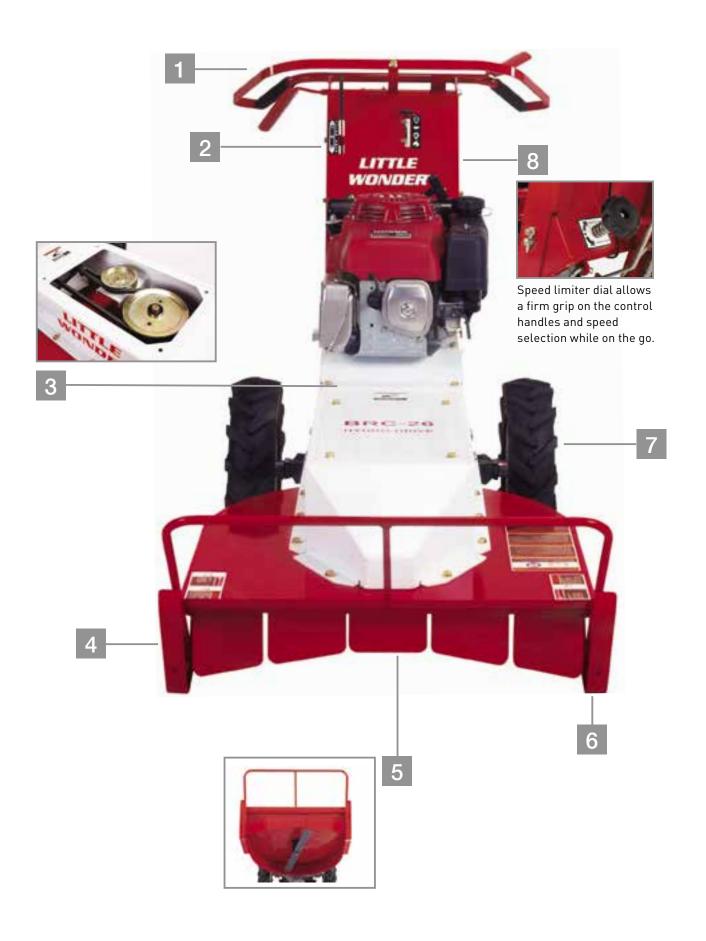

SERVICING AND PARTS

Our dealers will help you find the product to suit your requirements; they also offer advice, servicing, parts and product support from warranty to repairs on all our products. Spare parts are available and distributed through our dealer network in the UK.

Visit us online for product information and updates. The dealer locator on our website will help you find your nearest dealer.

www.lawnflite.co.uk

www.mantis.uk.com

www.gtmprofessional.com

www.littlewonder.com

www.classen.com

WARRANTY

A warranty is issued on all our garden machinery. This warranty covers faulty manufacture and materials of units which have been operated and maintained in accordance with the owner's instructions furnished with the unit and which have not been subject to misuse, abuse, neglect, accident, improper maintenance or alteration. Please see individual product pages for the length of warranty.

Annual servicing by an authorised Lawnflite specialist dealer will keep your equipment in top condition and ensure your machinery meets the Lawnflite two year warranty conditions.

Text and photographs, specifications of dimensions and performance are composed with the greatest care. The correctness of the information cannot be guaranteed, especially it is not guaranteed that the products comply with the images regarding colour, form and equipment or that the products comply with the proportion of the images. The engine horsepower information provided by the engine manufacturer is to be used for comparison purposes only.

Amendments due to misprints or errors are reserved. Please see the operator's manual and the warning labels posted on the item itself for more details. Subject to changes in prices.

